

Attenuation unit, removable

Attention: Each attenuation unit is calculated individually and can only be used for the application for which it was calculated.

Function:

Attenuation unit for green roof build-ups. The design is carried out on a project-specific basis, based on the KALA calculation check list for the attenuation unit. The element with a connection spigot and seal is designed for use as an extension unit in an drain with a diameter of 125 mm. Thanks to its removable construction, it can be removed and cleaned at any time.

Material:

FPO/PP, the materials are modified to be weather-resistant:
UV-stabilised, resistant to heat degradation and oxidative ageing as well as cold impact resistant.

Available sizes:


- Attenuation unit with matching lip seal for drain D 125 mm (DN 125)

Packaging units:

Delivery in box, PU 1 piece

Accessories:

- Inspection chamber for extensive green roofing
- Drain D 125 mm (DN 125 mm)

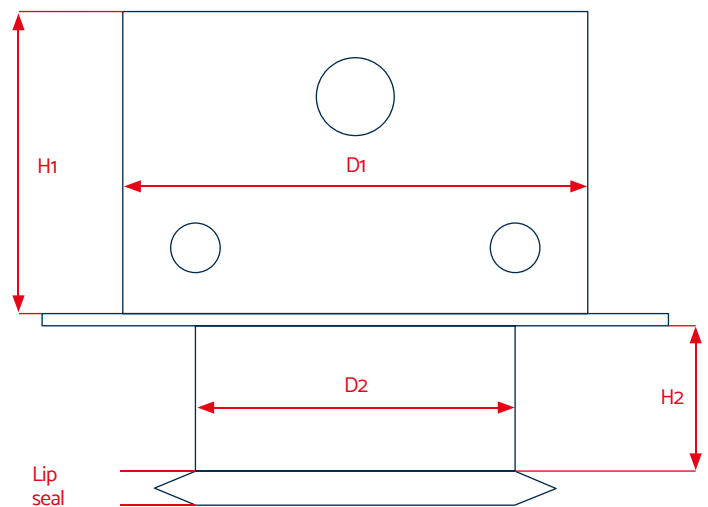

Technical data	
D1	D 160 mm (DN150)
D2	D 110 mm (DN 100)
H1	individually
H2	50 mm

¹ Also available in PE (roofing membranes based on PE)
KALA - KUNSTSTOFFE | Karl-Heinz Lange GmbH+Co.KG reserves the right to make technical changes.