

# Scupper Nexo Fix

**Attention:** The processing instructions of the roofing membrane manufacturers must be observed; Materials and material compounds used may be subject to changes

**Function:**

Moulded part for horizontal drainage through the parapet. Can be installed with a connection to a pipe system for water drainage or free discharge. When installing for emergency drainage, the exact installation point must be chosen depending on the water height.

**Installation:**

Push the scupper through the horizontal opening in the parapet and align it with the substrate. Secure it in position at four points on the substrate using the holes in the edge of the tray. Professionally weld the connection sleeve to the waterproofing membrane all around in accordance with the roofing membrane manufacturer's specifications.

**Material:**

Variants: PVC, FPO/PP and BIT for connection to the respective matching material variant of the roofing membrane. The base unit material is modified to be weather-resistant. UV-stabilised, resistant to heat degradation and oxidative ageing as well as cold impact resistant.

**Available sizes:**

- D 50 mm (DN 50)
- D 63 mm
- D 75 mm (DN 70)
- D 90 mm
- D 110 mm (DN 100)

**Packaging units:**


Delivery in box, PU 1 piece

**Accessories<sup>2</sup>:**

- Gravel guard
- Vapour barrier sheet

**Drainage capacity:**

LGA-certified performance data

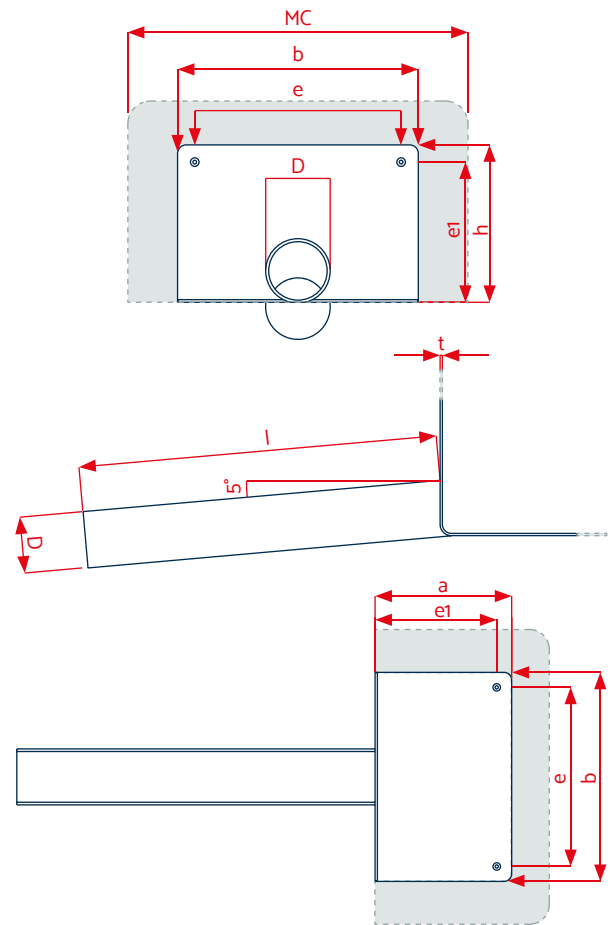

Diameter	Attenuation depth	
	35 mm	65 mm
D 50 mm (DN 50)	0.51 l/s	1.31 l/s
D 63 mm	n/a	n/a
D 75 mm (DN 70)	0.65 l/s	1.65 l/s
D 90 mm	0.65 l/s	1.90 l/s
D 110 mm (DN 100)	1.00 l/s	2.65 l/s

Technical data	
D	50 / 63 / 75 / 90 / 110 mm
l	480 mm <sup>1</sup>
a	112 mm
b	280 mm
h	186 mm
e	240 mm
e1	166 mm
t	3 mm
Membrane connection (MC)	L 494 x B 484 mm
Pipe inclination 5°	

<sup>1</sup>Special lengths available on request / <sup>2</sup> Also available with accumulation ring  
 KALA - KUNSTSTOFFE | Karl-Heinz Lange GmbH+Co.KG reserves the right to make technical changes.