

Cold roof vent with weather protection cap

Attention: The processing instructions of the roofing membrane manufacturers must be observed; Materials and material compounds used may be subject to changes

Function:

- Ventilation of roof constructions
- For a moisture-saturated roof package for moisture removal and drying out

Installation:

Align the fan on the substrate and secure it in position at four points on the substrate using the holes provided on the edge of the tray. Guide the membrane onto the tray and join the membrane and tray with at least 20 mm weld seam width. For the BIT version, integrate the factory-laminated bitumen connection professionally into the multi-layer waterproofing system.

Material:



Variants PVC, FPO/PP² and BIT for connection to the respective matching material variant of the roofing membrane. The materials are modified to be weather-resistant: UV-stabilised against heat degradation and oxidative ageing as well as cold impact resistant.

Available sizes:

- D 75 mm (DN 70)
- D 110 mm (DN 100)
- D 125 mm (DN 125)
- D 160 mm (DN 150)

Packaging units:

Delivery in box, PU 1 piece

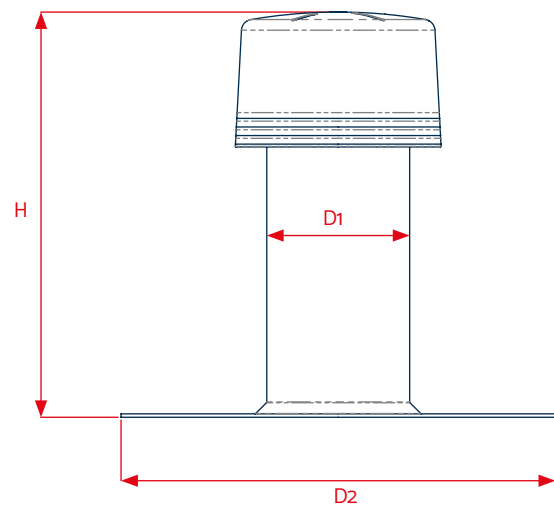

Technical data	
H	354 mm ¹
D1 (D Pipe)	D 75 mm (DN 70) / D 110 mm (DN 100) / D 125 mm (DN 125) / D 160 mm (DN 150)
D2 (D Plate)	for size D 75 mm (DN 70) = 300 mm for all others = 380 mm

¹Special lengths available on request / ²Also available in PE (roofing membranes based on PE)
KALA - KUNSTSTOFFE | Karl-Heinz Lange GmbH+Co.KG reserves the right to make technical changes.