

Stack vent Nexo Fix with weather protection cap

Attention: The processing instructions of the roofing membrane manufacturers must be observed; Materials and material compounds used may be subject to changes

Function:

The stack vent is used for ventilation:

- Ventilation of bathrooms and toilets without external windows
- Waste water ventilation
- Ventilation of extractor hoods in kitchens
- Controlled living space ventilation

Installation:

Align the fan on the substrate and secure it in position at four points on the substrate using the holes provided on the edge of the tray. Professionally weld the connection sleeve to the waterproofing membrane all around in accordance with the roofing membrane manufacturer's specifications.

Material:



Variants: PVC, FPO/PP and BIT for connection to the respective matching material variant of the roofing membrane. The base unit material is modified to be weather-resistant. UV-stabilised, resistant to heat degradation and oxidative ageing as well as cold impact resistant.

Available sizes:

- D 75 mm (DN 70)
- D 110 mm (DN 100)
- D 125 mm (DN 125)
- D 160 mm (DN 150)

Packaging units:

Delivery in box, PU 1 piece

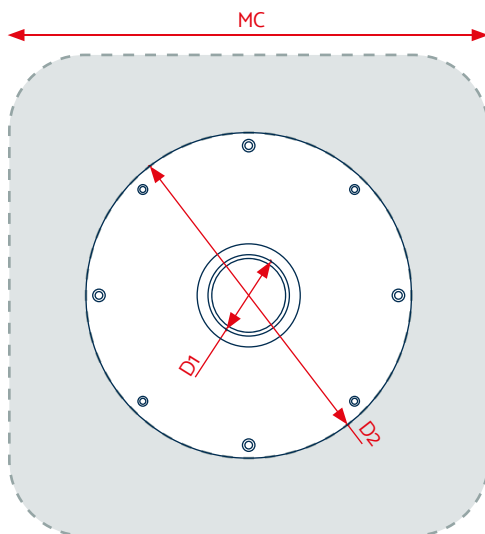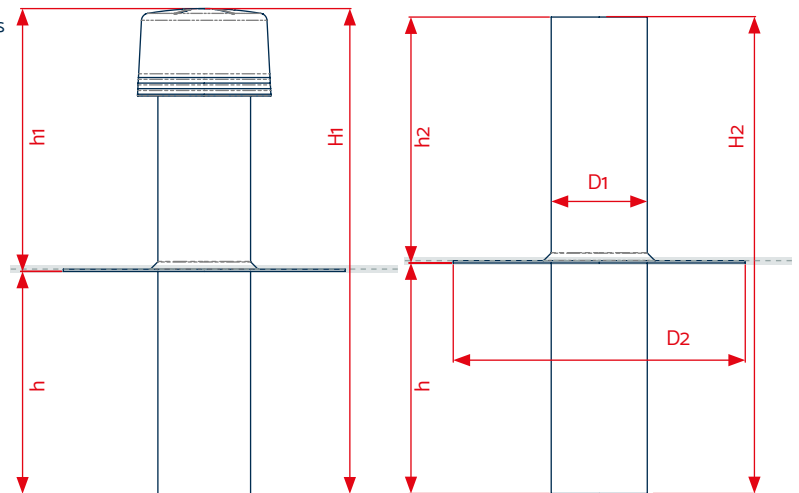

Technical data		
H1 (with cap) ¹	654 mm	
H2 (without cap) ¹	620 mm	
D1 (D Pipe)	DN 70 / DN 100 / DN 125 / DN 150	
D2 (D Plate)	for size DN 70 = 300 mm for all others = 380 mm	
h1 (with cap)	354 mm	
h2 (without cap)	320 mm	
h	300 mm	
Membrane connection (MC)	D 75 mm (DN 70)	L 500 x B 500 mm
	D 110 mm (DN 100) to D 160 mm (DN 150)	L 580 x B 580 mm

¹Special lengths available on request. KALA - KUNSTSTOFFE | Karl-Heinz Lange GmbH+Co.KG reserves the right to make technical changes.