

## Inspection pipe Nexo Fix one-piece

**Attention:** The processing instructions of the roofing membrane manufacturers must be observed; Materials and material compounds used may be subject to changes

### Function:

The inspection pipe allows for regular, simple and safe inspection of the flat roof without the need for destructive opening. Leaks can therefore be discovered quickly, significantly reducing the extent of damage.

### Installation:

For each selected section, the inspection pipe is placed on the vapour barrier, ideally at the lowest point. Optionally, position fixing against shifting can be carried out. Subsequently, laying of insulation and waterproofing with professional connection of the waterproofing to the pipe of the inspection nozzle.

### Material:

- PVC similar to RAL 7035, Light Grey
- FPO/PP similar to RAL 7044, Silk Grey

### Delivery unit:


Inspection pipe, consisting of a base unit with a pull-out closure cap, a pre-assembled clamp ring and an insulation core mounted in the cap.

### Available sizes:

D 125 mm (DN 125)

### Packaging units:

Delivery in polybag, PU 1 piece

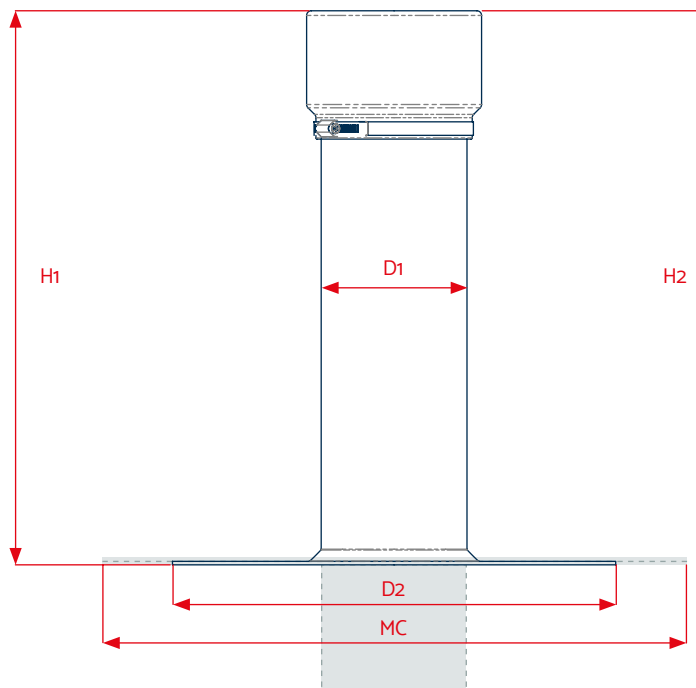

Technical data		
H1	380 mm <sup>1</sup>	
H2 (with polystyrene core)	605 mm	
D1 (D Pipe)	125 mm	
D2 (D Plate)	380 mm	
Membrane connection (MC)	D 125 mm (DN 125)	L 580 x B 580 mm

<sup>1</sup>Special lengths available on request.

KALA - KUNSTSTOFFE | Karl-Heinz Lange GmbH+Co.KG reserves the right to make technical changes.