

Lightning conductor clip

Function:

Ideal for securely fastening lightning conductor lines to flat roofs

Material:

- Polyamide Grey
- Cold impact resistant, weather-resistant, UV-stabilised
- Processing temperature: +50°C to -10°C

Available sizes:

For lightning conductor lines 8 - 10 mm



Packaging units:

Delivery in box, PU 50 pieces

Accessories:

Sealing patch for fixing to the roofing membrane:

- PVC³
- FPO/PP^{1,3}
- BIT Sanded²

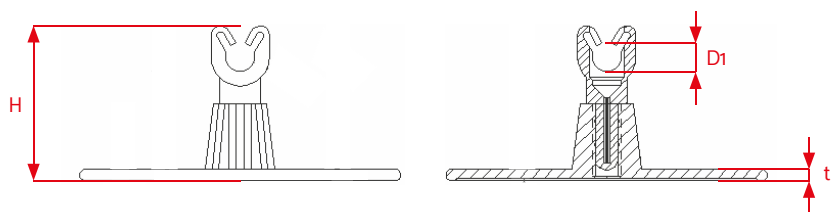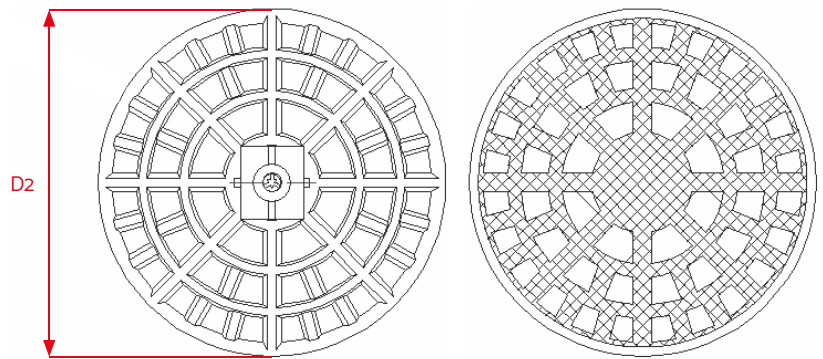

| Technical data | |
|----------------|-----------|
| H | 53 mm |
| D1 | 8 - 10 mm |
| D2 | 110 mm |
| t | 3 mm |

¹ Also available in PE (roofing membranes based on PE) (sealing patch)

² **Also available in a custom-made slate-coated version (sealing patch)**

³ The thickness of the membrane is at least 1.8 mm

KALA - KUNSTSTOFFE | Karl-Heinz Lange GmbH+Co.KG reserves the right to make technical changes.