

Energy conduit warm roof

Attention: The processing instructions of the roofing membrane manufacturers must be observed; Materials and material compounds used may be subject to changes

Function:

Feed-through of cables/lines through the roof package.

Installation:

Insert the lower pipe part into the prepared opening in the roof package. Align the vent on the substrate and secure it in position at four points via the holes provided on the edge of the mounting flange. Weld the waterproofing membrane onto the horizontal flange area professionally, according to the roofing membrane manufacturer's processing specifications. Feed the cables and lines up through the vent, then thread them through the gooseneck bend. Position the gooseneck bend precisely on the lower part of the vent and press down firmly all around. Finally, check that the gooseneck bend is in the correct position and is fixed securely.

Material:



Variants: FPO/PP, PVC and BIT (with a laminated bitumen connection sleeve). The base unit material is modified to be weather-resistant. UV-stabilised, resistant to heat degradation and oxidative ageing as well as cold impact resistant.

Available sizes^{1,2}:

- D 75 mm (DN 70)
- D 110 mm (DN 100)
- D 125 mm (DN125)
- D 160 mm (DN150)

Packaging units:

Delivery in box, PU 1 piece

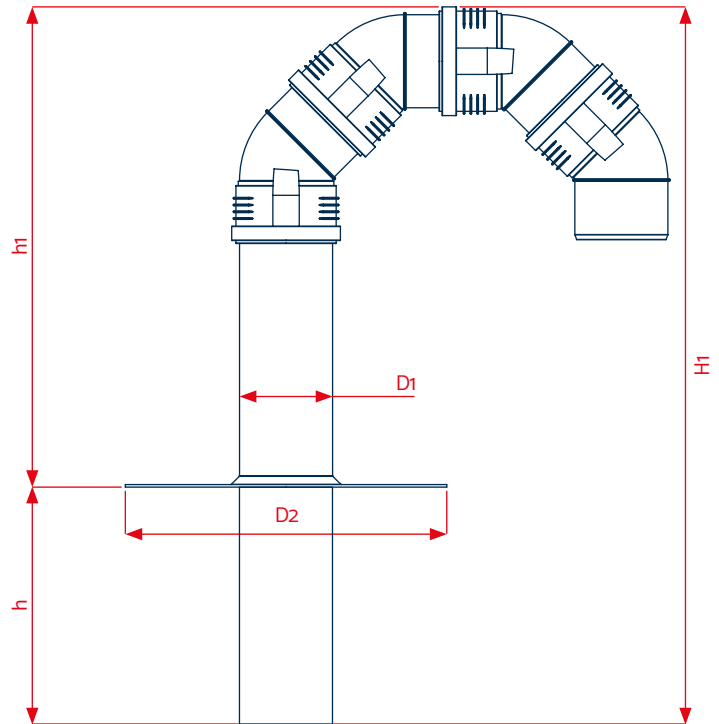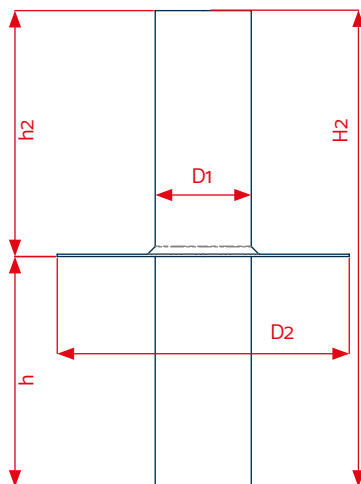

Technical data				
H1 (with gooseneck)	755 mm	800 mm	833 mm	862 mm
H2 (without gooseneck)	617 mm	617 mm	617 mm	617 mm
D1 (D Pipe)	D 75 mm (DN 70)	D 110 mm (DN 100)	D 125 mm (DN125)	D 160 mm (DN150)
D2 (D Plate)	300 mm	380 mm	380 mm	380 mm
h1 (with gooseneck)	450 mm	495 mm	528 mm	557 mm
h2 (without gooseneck)	320 mm	320 mm	320 mm	320 mm
h	295 mm	295 mm	295 mm	295 mm

¹Special lengths available on request / ² **Attention:** Please note that the visual representation may differ from the illustration
 KALA - KUNSTSTOFFE | Karl-Heinz Lange GmbH+Co.KG reserves the right to make technical changes.