

# Emergency overflow Nexo Fix, round

## Function:

Molding for horizontal emergency drainage through the parapet. Installation with Connection to a pipe system for water drainage or free jet. At the installation, the exact installation point must be taken into account depending on the water height.

## Installation:

Push the emergency overflow through the horizontal opening in the parapet, align it on the subsurface and securely secure it in position at four points in the subsurface using the holes on the edge of the tray. The connection sleeve with the Sealing membrane all around professionally and according to the manufacturer's specifications of the roofing membrane manufacturer.

## Material:

Versions PVC and FPO/PP with welded connection sleeve for easy connection to the appropriate roofing membrane. The material of the ground body is weatherproof modified: UV-stabilized, against heat degradation and oxidative aging as well as cold impact resistant.

## Available sizes:

- D 50 mm (DN 50)
- D 63 mm
- D 75 mm (DN 70)
- D 110 mm (DN 100)
- D 125 mm (DN 125)

## Package units:

Supplied in cartons, PU 1 unit


## Accessories:

Vapour barrier sheet for scupper and emergency overflow, round

## Drainage performance litre/sec.:

LGA-certified characteristics

Diameter	Accumulation height	
	35 mm	65 mm
D 50 mm (DN 50)	0,51	1,31
D 75 mm (DN 70)	0,65	1,65
D 110 mm (DN 100)	1,00	2,65
D 125 mm (DN 125)	1,00	2,80

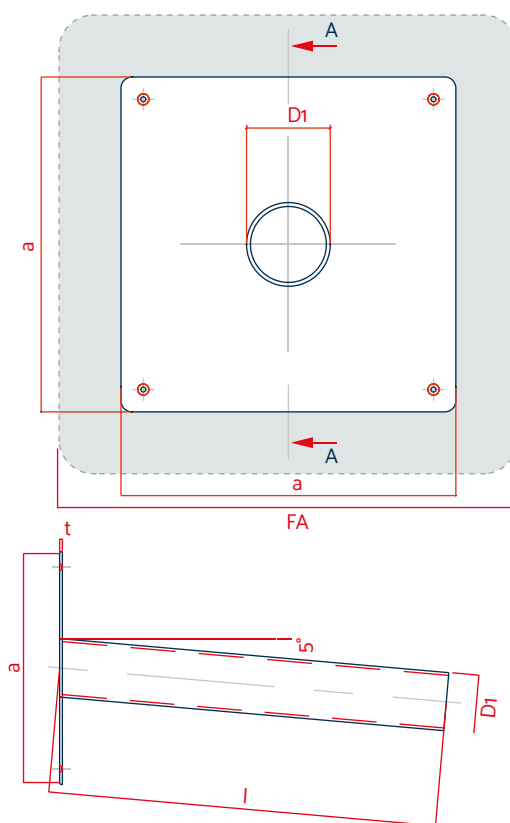

Technical data		
D1	50 / 63 / 75 / 110 / 125	mm
a	300	
l	490 <sup>1</sup>	
t	3,0	
Foil connection (FA)	L 500 x B 500	
Pipe inclination 5°		

<sup>1</sup>Special lengths available on request / <sup>2</sup>**Attention:** The processing instructions of the roofing membrane manufacturer must be adhered to; Materials and used material compounds may be subject to change. KALA – KUNSTSTOFFE | Karl-Heinz Lange GmbH+Co.KG reserves the right to make technical changes.