

Flat roof fans Nexo Fix for ventilation lines with weather cap

Function:

The flat roof fans are used for ventilation:

- Ventilation of bathrooms and toilets without outside windows
- Dirty water ventilation
- Ventilation of extractor hoods in kitchens
- Controlled living space ventilation

Installation:

Align the fan on the ground and over the holes on the Fasten the edge of the tray securely at four points in the subsurface. Professionally weld the connection sleeve to the sealing membrane all around and in accordance with the roofing membrane manufacturer's specifications.

Material:


Versions PVC and FPO/PP with welded connection sleeve for easy connection to the appropriate roofing membrane. The material of the ground body is weatherproof modified: UV-stabilized, against heat degradation and oxidative aging as well as cold impact resistant.

Available sizes:

- D 75 mm (DN 70)
- D 125 mm (DN 125)
- D 110 mm (DN 100)
- D 160 mm (DN 150)

Package units:

Supplied in cartons, PU 1 unit

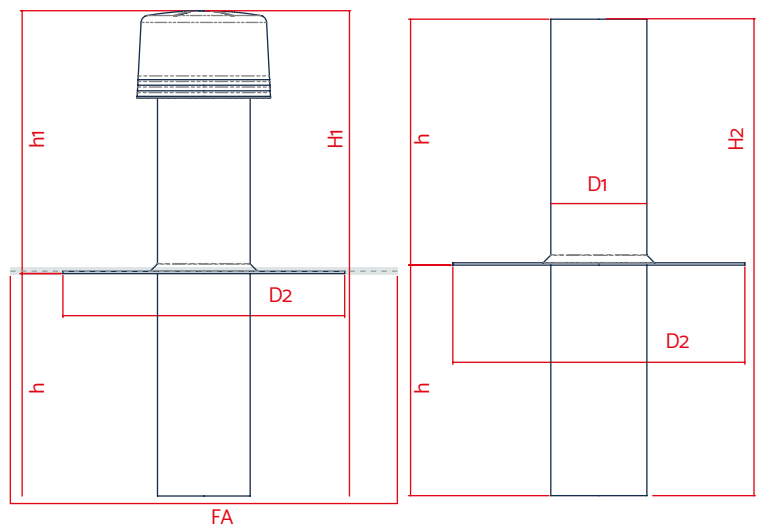

Technical data		
H1 with cap	654 mm	
H2 without cap	620 mm	
D1	DN 70 / DN 100 / DN 125 / DN 150	
D sheet D2	For size DN 70 = 300 mm For all others = 380 mm	
h1 with cap	334 mm	
h2 without cap	300 mm	
h	320 mm	
Foil connection (FA)	D 75	L 500 x B 500 mm
Foil connection (FA)	D 110 up to D 160	L 580 x B 580 mm

¹ **Attention:** The processing instructions of the roofing membrane manufacturer must be adhered to; Materials and used material compounds may be subject to change. KALA - KUNSTSTOFFE I Karl-Heinz Lange GmbH+Co.KG reserves the right to make technical changes.