

Internal and external corners for roof membranes

Function:

Moulded part for connections and terminations in corner formations, can be used on both sides (see illustration).

Versions:

PVC Light grey, FPO/PP in White, Gray, Beige gray and Anthracite gray for connection to the matching roofing membrane material type. The materials are modified to be weather-resistant; UV-stabilised, against heat degradation and oxidative ageing as well as resistant to cold impact

Connection Method:



Welding, for direct connection to the roof membrane

Material 1:

- PVC Light grey
- FPO/PP White, Beige gray, Gray, Anthracite gray

Package units:

Supplied in cartons, PU 25 units

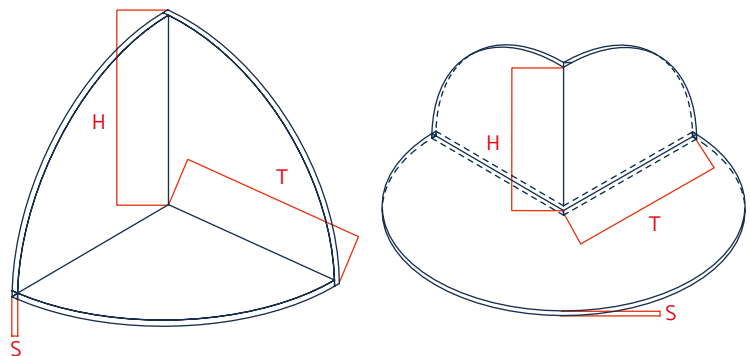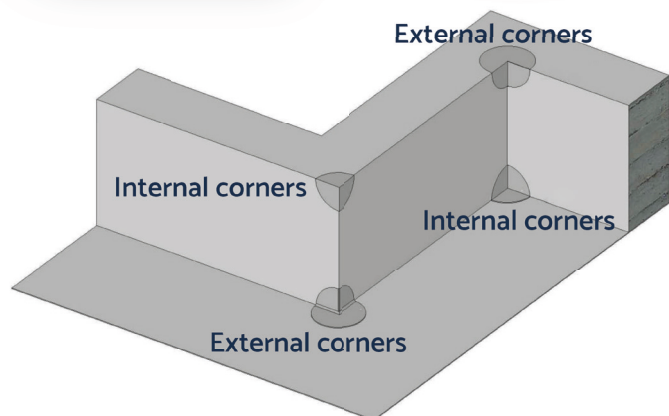

Technical data			
	Interior corner	External corner	
H	95	102	mm
T	85	90	
S	2	2	

¹ Also available in PE (roofing membranes based on PE). KALA - KUNSTSTOFFE | Karl-Heinz Lange GmbH+Co.KG reserves the right to make technical changes.