

Lightning protection wire holders

Function:

For the simple and secure attachment of lightning protection lines on flat roofs

Material:

- Polyamide Gray
- Low-temperature impact resistant plastic, weatherproof, UV-stabilized
- Application temperature is between +50 °C and -10 °C

Available sizes:

For lightning protection lines 8 - 10 mm



Package units:

Supplied in cartons, PU 50 units

Accessories:

Metal blank for attachment to the roof sheeting:

- PVC
- FPO/PP¹
- BIT

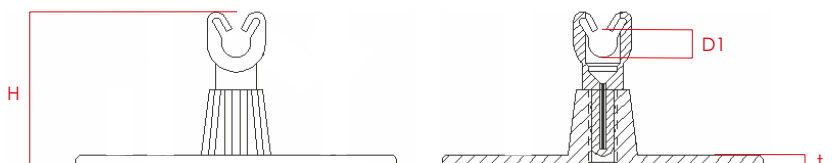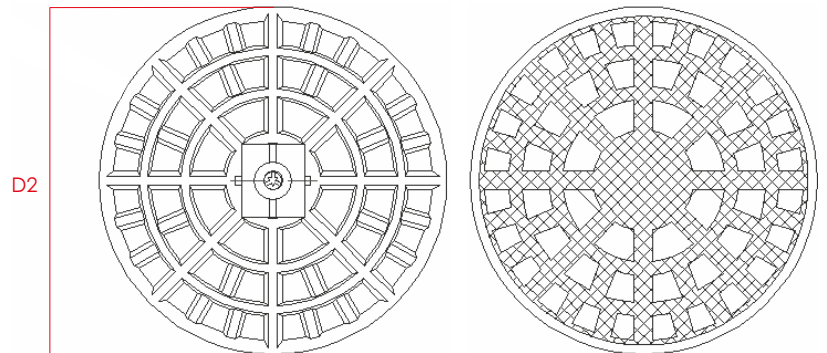

Technical data		
H	53	mm
D1	8 - 10	
D2	110	
t	3	

¹ Also available in PE (roofing membranes based on PE). KALA - KUNSTSTOFFE I Karl-Heinz Lange GmbH+Co.KG reserves the right to make technical changes.