

Gravel basket Vario Fix variably adjustable for scupper

Function:

Molded part as an attachment for downspouts. It serves to retain large dirt particles, preventing blockages in the drainage system. The flow-optimized geometry ensures low loss values and high flow throughput, even during heavy rainfall.

Installation:

The delivery is ready for installation. Place the gravel basket centrally on the scupperpout, press the locking button downwards, and turn it to the right to lock – done. The spreader feet can be continuously adjusted to the diameter of the scupperpout using the rotating mechanism. For later disassembly, simply turn the knob to the left to unlock and pull it out. The spreader feet can be easily pressed together again once unlocked.



Material:



- PE Black
- Low-temperature impact resistant plastic, weatherproof, UV-stabilized

Available sizes:

- Suitable for all diameters ranging from D 50 mm (DN 50) to D 125 mm (DN 125)
- Specify desired size when ordering

Package units:

Supplied in cartons, PU 10 units

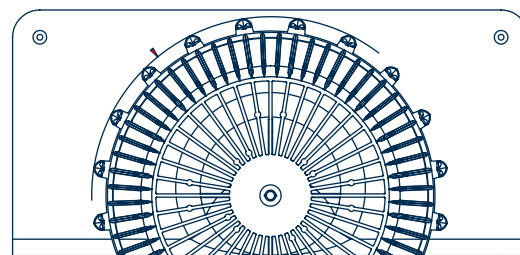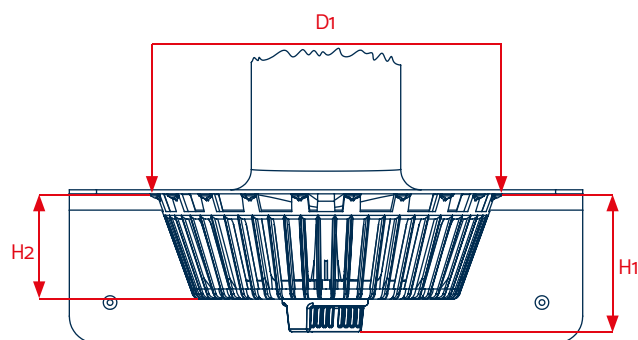

Technical data	
H1	95 mm
H2	77.5 mm
D1	262 mm