

Renovation drain Nexo Fix

Attention: The processing instructions of the roofing membrane manufacturer must be adhered to; Materials and used material compounds may be subject to change.

Function:

The renovation scupper, consisting of a base body with a gravel basket and lip seal, is the solution for repairing old scuppers in the roof assembly. The vertical pipe with the attached lip seal is inserted into the existing old scupper. The tray of the renovation scupper provides a secure connection for the waterproofing membrane.

Material:


Variants in PVC and FPO/PP with welded connection sleeve for easy connection to the compatible roof membrane. The material of the base body is modified to be weather-resistant: UV-stabilized, resistant to thermal degradation and oxidative aging, as well as impact-resistant in cold temperatures.

Available sizes:

- D 50 mm (DN 50)
- D 95 mm
- D 125 mm (DN 125)
- D 75 mm (DN 70)
- D 110 mm (DN 100)
- D 160 mm (DN 150)

Package units:

Supplied in cartons, PU 1 unit

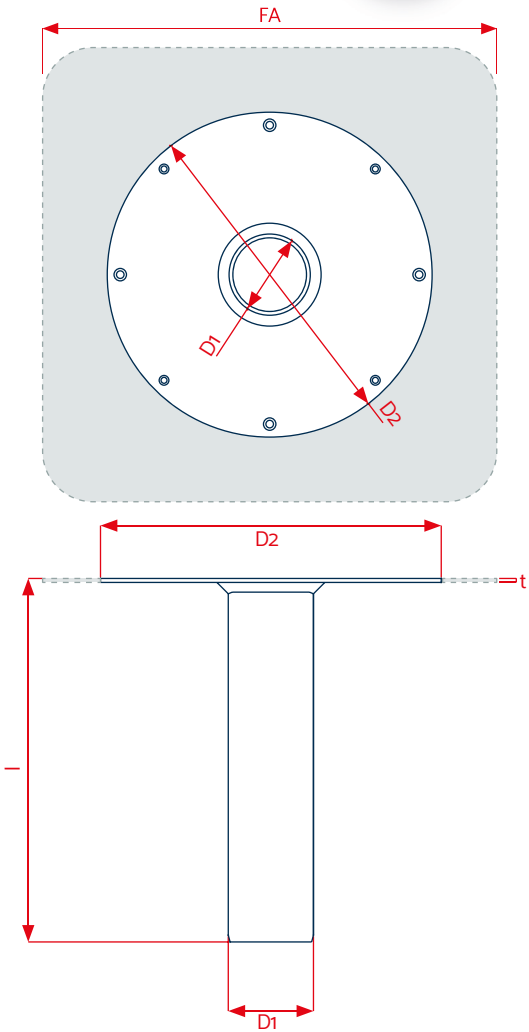

Drainage performance:

LGA-certified characteristics

Diameter	Accumulation height	
	35 mm	65 mm
D 50 mm (DN 50)	3.70 litre/sec.	N/A
D 75 mm (DN 70)	4.60 litre/sec.	13.20 litre/sec.
D 110 mm (DN 100)	5.55 litre/sec.	15.80 litre/sec.
D 125 mm (DN 125)	5.55 litre/sec.	16.00 litre/sec.
D 160 mm (DN 150)	5.60 litre/sec.	18.60 litre/sec.

Technical data		
D1	50 / 75 mm	95 / 110 / 125 / 160 mm
D2	300 mm	380 mm
l	320 mm ¹	320 mm ¹
t	3.5 mm	3.5 mm
Foil connection (FC)	D 50 mm (DN 50) to D 75 mm (DN 70)	L 500 x W 500 mm
Foil connection (FC)	D 90 mm to D 160 mm (DN 150)	L 580 x W 580 mm

KALA – KUNSTSTOFFE | Karl-Heinz Lange GmbH+Co.KG reserves the right to make technical changes.